



INVIUS™

INNOVATIVE
PERFORMANCE

ENHANCED VINYL TILE



MULTI BLUE 37 + MULTI GREEN 36 + SEA BLUE 34 + HUNTER GREEN 32 + GREYSTONE 23

Superior Durability, Modern Style, and Easy Care. That's INVIUS.


The floor that adapts beautifully to high-traffic environments:
EDUCATION, HEALTHCARE, CORPORATE, AND RETAIL.

Built for Long-Term Performance:

- ✓ **3mm Thick:**
Matches the thickness of existing VCT installations and other resilient flooring options, which reduces the need for transitions. It's also more forgiving with subfloor imperfections.
- ✓ **24" x 24" Tiles:**
Larger tile size reduces the number of seams and speeds up the installation process.
- ✓ **EPT Shield:**
Provides superior scratch, stain, and chemical resistance without ever requiring a wax or surface finish. This technology also features antibacterial properties.
- ✓ **EMT Core:**
Multilayered construction that offers industry-leading dimensional stability with eco-friendly and low-VOC materials.
- ✓ **Easy Maintenance:**
 - Occupancy ready
 - Easily repairable
 - No stripping or waxing required



ANTIBACTERIAL




DIMENSIONAL STABILITY



SCRATCH RESISTANCE



STAIN RESISTANCE



EASY MAINTENANCE



NO WAX


LCA | LIFECYCLE COST ANALYSIS

Maximize Your Investment. Minimize Your Costs. With INVIUS.

When considering flooring solutions, it's important to look at the entire lifecycle to determine the true costs involved.


+ INSTALLATION COST

The initial installation cost of INVIUS is 70% less than terrazzo.

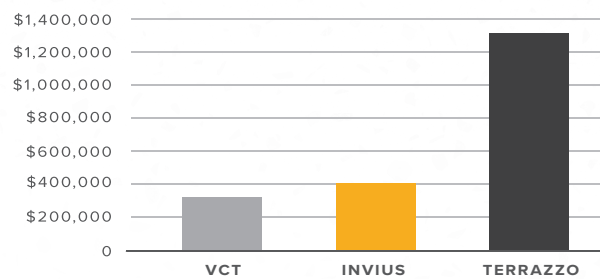

+ MAINTENANCE COST

Over 5 years, INVIUS offers a 30% savings over ongoing maintenance of VCT.

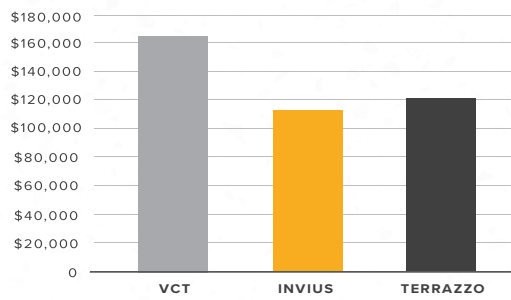


+ MAINTENANCE REQUIRED

Stripping and waxing a VCT floor averages \$1 per square foot. And over a 20-year lifecycle, that floor would need to be stripped and waxed roughly 40 times.

By comparison, INVIUS never needs stripping, waxing, sealing, or finishing.


REQUIRED MAINTENANCE	VCT		TERRAZZO		INVIUS	
	YES	FREQUENCY	YES	FREQUENCY	YES	FREQUENCY
DUST MOP	✓	DAILY	✓	DAILY	✓	DAILY
WET/DAMP MOP	✓	DAILY	✓	DAILY	✓	DAILY
DEEP SCRUB/BUFFING	✓	ANNUALLY	✓	ANNUALLY	✓	ANNUALLY
DRY BUFF USING 1,500 RPM MACHINE	✗		✓	QUARTERLY		
SPRAY BUFF USING 175-600 RPM MACHINE	✓	MONTHLY	✗			
APPLY FLOOR FINISH	✓	QUARTERLY	✗			
STRIP AND WAX	✓	INITIAL + ANNUALLY	✗			
STRIP AND RESEAL	✗		✓	INITIAL + EVERY 5 YRS		

+ TOTAL COST OF OWNERSHIP

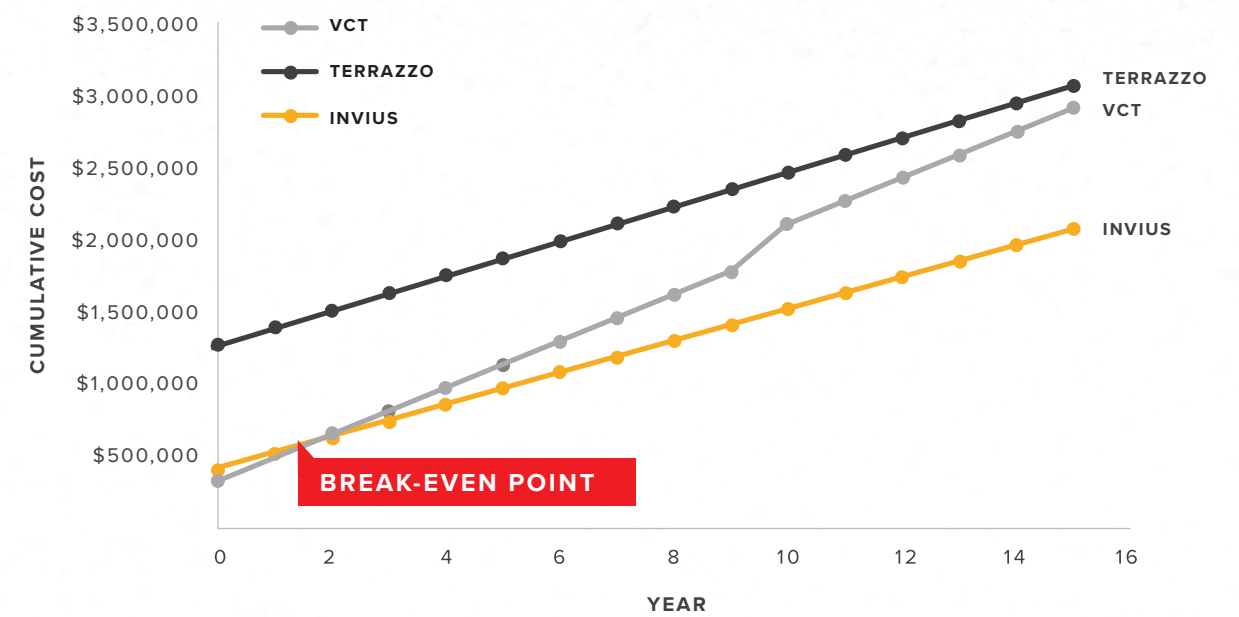


MULTI BLUE 37



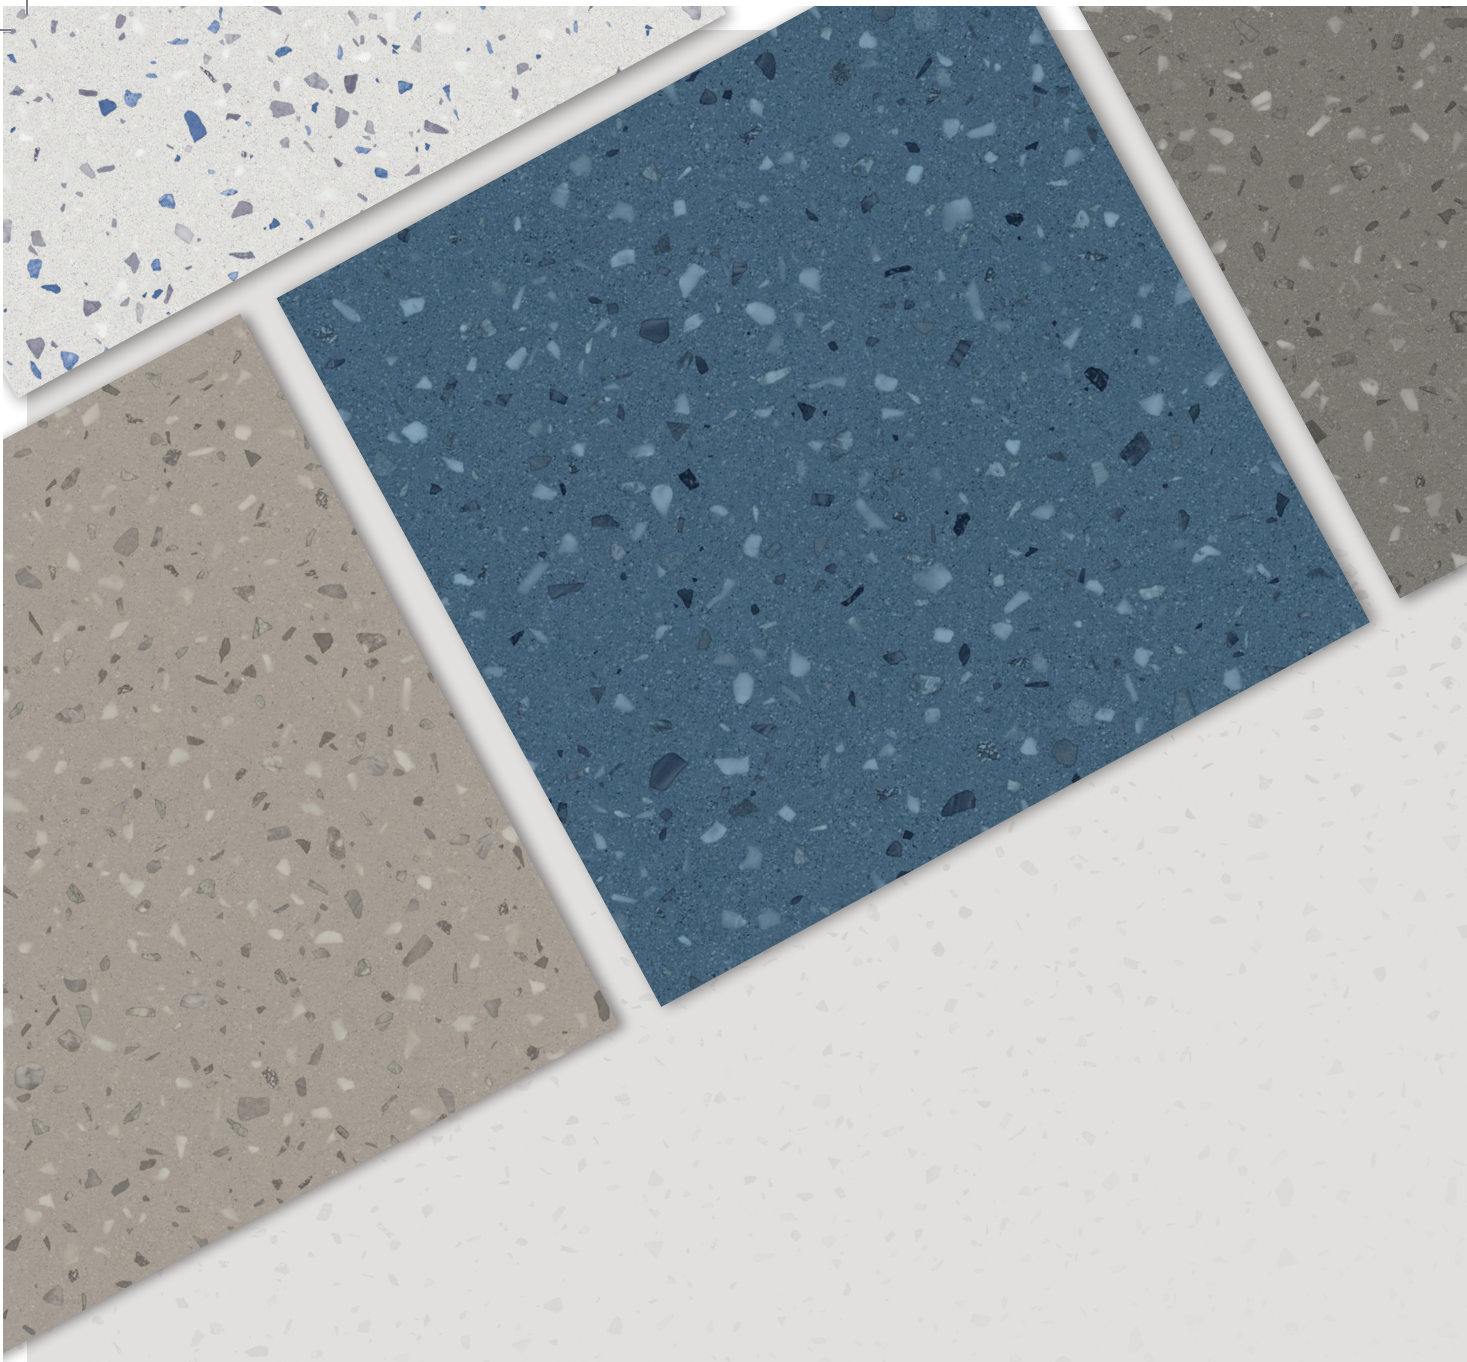


Explore our palette to discover the perfect combination for your next project.

HARMONIES

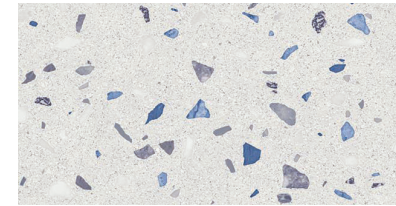


MULTI BLUE 37

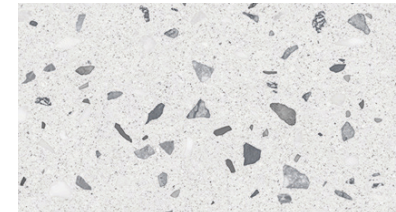

MULTI GRAY 13



MULTI GREEN 36

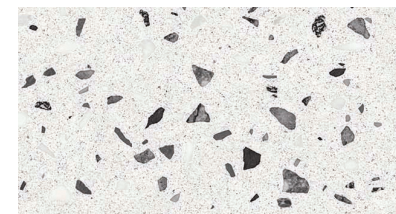

MULTI BLACK 38




GLACIER 21




GRAPHITE 26


NEUTRALS

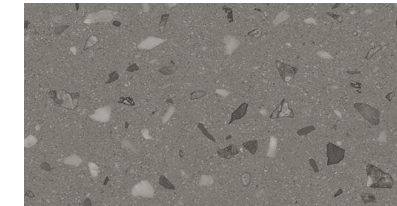


GREYSTONE 23

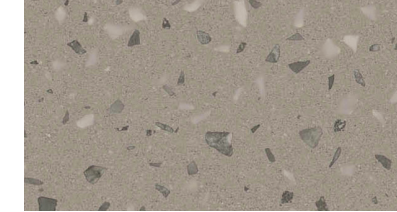


SANDSTONE 30

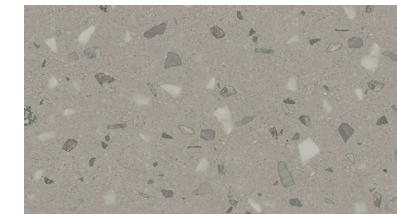


DOLPHIN 31

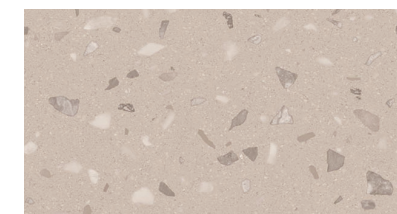

BONE | 22

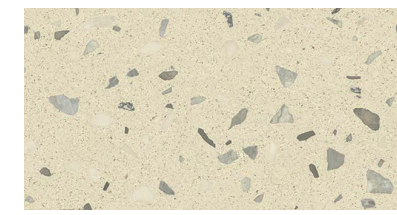


KHAKI 29

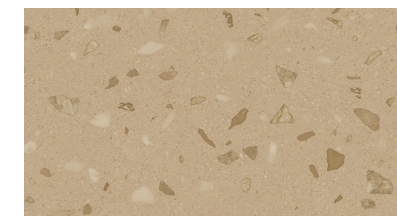


BEACH 27


PRIMARIES

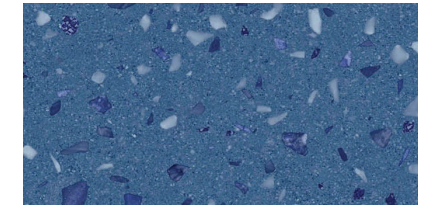


ROYAL 24

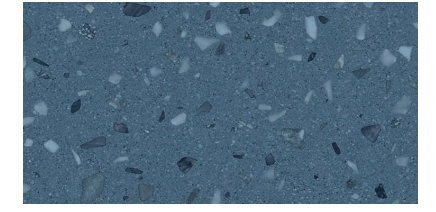

SEA BLUE 34

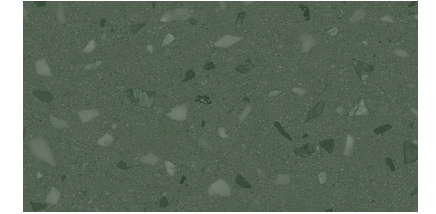


SEAFOAM 28

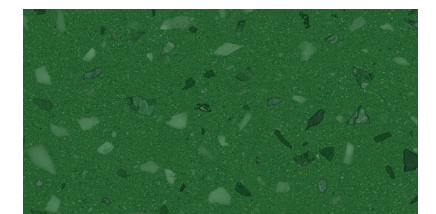

HUNTER GREEN 32



CANARY 35

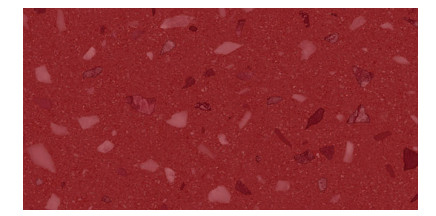

SPARK 25

INVIUS COLOR

The INVIUS color palette features three distinct groups designed to complement one another seamlessly.

Our innovative large chip design delivers a premium, realistic terrazzo visual that enhances any space.

The wide range of neutral colors blends beautifully with vibrant primaries and coordinating field tile colors, making it simple to create cohesive and striking tone-on-tone designs across various environments.

3MM | 24" X 24" Tile | 20MIL

INVIUS:

Where Durability Meets Design

MULTI GREEN 36



MULTI GRAY 13 ►
KHAKI 29 + SANDSTONE 30 ▼





GLACIER 21 + SEAFOAM 28

TECHNICAL SPECIFICATIONS

TEST SPECIFICATION	STANDARD	RESULTS
Application Type	ISO 10874	33, Heavy Commercial
Static Load Limit	ASTM F970	2,000 PSI
Squareness & Straightness	ISO 24342 ASTM F2055	Passes No Deviation, $\leq 0.1\text{mm}$
Flexibility	ASTM F137	Passes
Dimensional Stability	ASTM F2199	Passes
Resistance to Chemicals	ASTM F925	Passes, No defects
Resistance to Light	ASTM F1515	Passes
Resistance to Heat	ASTM F1514	Passes
Fire Resistance	ASTM E648	Passes
Smoke Density	ASTM E662	Passes
Slip Resistance	ASTM E303	Passes
Indoor Air Quality		Low VOC, Floor Score Certified
Dynamic Coefficient of Friction	ANSI A326.3	0.43

PACKAGING SPECIFICATIONS


SIZE	THICKNESS	SF/CARTON	LB/CARTON	CARTON/PLT SF/PLT
23.62" x 23.62"	3mm	38.75 sf	36.43 lb	40 ctns 1,550 sf



NO WAX



ANTIBACTERIAL



DIMENSIONAL
STABILITY



SCRATCH
RESISTANCE



STAIN
RESISTANCE



EASY
MAINTENANCE